

gizir[®]
WOOD PRODUCTS


**3D
PANEL**

M
MATILDA WOOD
Where Wood Meets Art



What is 3D PANEL?

3D Panel is our newest innovative solution for premium interior furniture. MDF is first laminated with a foam layer. Then, foam laminated MDF is covered with the desired foil. As the last step, pressure is applied on the panel to give it the desired 3D design.



PVC OR PP
DECORATIVE FOIL
FOAM
MDF

DOUBLE FACED/
WHITE MELAMINE
BACKSIDE

**DOUBLE FACED/
WHITE MELAMINE
BACKSIDE**

PANEL DIMENSIONS

Width	1220mm
Length	2800mm
Thickness	18/10mm

*thickness options available











COLOR & DECORS



S027



S034



S040



7093




7094





2

*Design Options
available in
SUPERMATT*

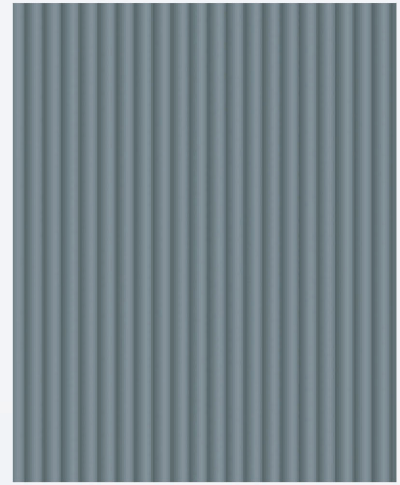

3D03

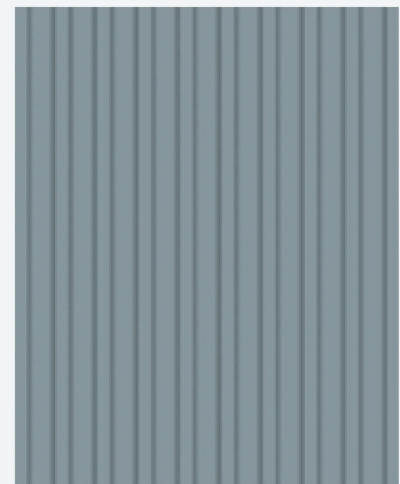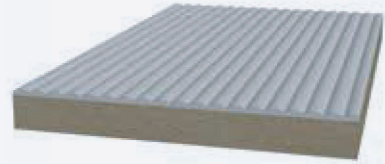



3D06



*Custom designs can be made upon request.

*Aluminium J handles of same color & foils are available.

How to FINISH THE SIDES?

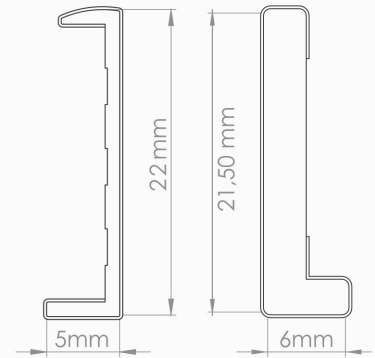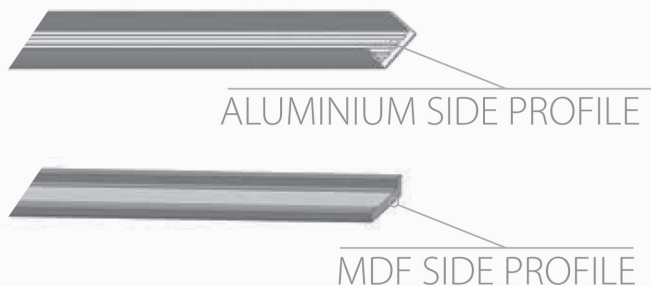


SIDE PROFILES (mm)

Length	2800
Width	22 / 21,5

Instead of regular edgebanding, aluminium or MDF edge profiles of same color & foil are used to achieve a cleaner & more elegant look. Accessories can be applied by using PU transparent mounting adhesive in the applications of both J handle and aluminium edge profile

- * Custom designs can be made upon request.
Aluminium J handles of same color & foils are available.

If aluminium edge profiles are going to be used for all 4 sides they should be cut in a 45° angle.

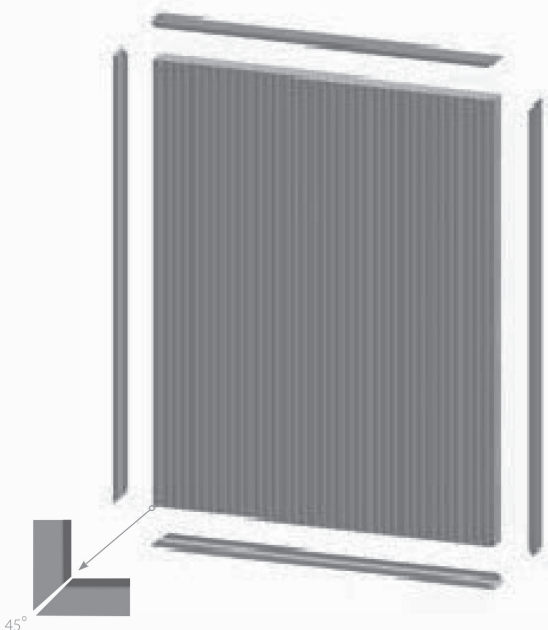

Use PU transparent mounting adhesive in the applications of aluminium edge profiles.



TECHNICAL INFORMATIONS

No	FEATURE	VALUE	RESULT (Super matt)	STANDART
1	Gloss level (60° angle)	-	5 GU	TS EN 14323
2	Scratch resistance	H	3H	TS 7385
3	Assessment of surface resistance to wet heat (85°C)	5	5 (No change)	TS EN 12721+A1:2014:02
4	Assessment of surface resistance to dry heat (70°C)	5	5 (No change)	TS EN 12722+A1:2014:02
5	Surface abrasion resistance	5	250 rev. (Class 4)	TS EN 14323 : 2021-12 6.9
6	Behavior towards impact loading by falling steel ball	5	2 (There is change)	TS EN 14323:2021-12 6.13
7	Test of water steam resistance	5	2 (There is change)	TS EN 14323:2021-21,Art. 6.10
8	Resistance to staining	5	5 (No change)	TS EN 14323 6.6
9	Assessment of surface resistance to chemical cold liquids (Acetic acid, acetone, ammonia solution, citric acid, cleaning agent, etc.)	5	5 (No change)	TS EN 12720:2009+A1:2014-02
10	Colorfastness to light	5	5. Grade	TS EN 15187
11	Thickness tolerance	-	± 0,30 mm	TS EN 324-1
12	Bow tolerance	-	3,5 mm / m	Gizir
13	Width and Length tolerance	-	± 5 mm / m	TS EN 324-1

- These values are weighted average of the test results.

- The test results of the 6th and 7th tests became the 2nd level out of the 5th level according to the product standard determined by TSE.



Abuja :

Plot 833, idu industrial area, near LG

+234 813 911 3325

+234 909 426 1828

Inab@matildarozi.com

Lagos :

Block D, plot 2, Dayo Adebisi close

isolo industrial estate

+234 906 600 9000

+234 802 866 6665

Inla@matildarozi.com

Warri:

Refinery road, Aribogha street,

Alibuting warehouse

+234 707 911 1113

inwa@matildarozi.com